

ASSEMBLY GUIDE

Brush Cutter Multi Tool



Quick Assembly Guide

For installation questions or if you need any replacement components, please call 02 4257 4787 or email bbt@bbta.com.au



What's in the box:

- | | |
|------------------------|-------------------|
| 1x Engine | 1x Safety Cover |
| 2x Extension Poles | 3x Blades |
| 1x Hedge Trimmer | 1x Chainsaw Cover |
| 1x Hedge Trimmer Pole | 1x Chainsaw Bar |
| 2x Hedger Blades Cover | 1x Chainsaw Chain |
| 1x Chainsaw Pole | 1x Mixing Bottle |
| 1x Brush Cutter Pole | 1x Tool Set |
| 1x Handle | 1x Owner's Manual |
| 1x Line Trimmer Head | |



1. Install the handle. Remove the screws and remove the lower cap from the handle.



1a. Position the handle in a comfortable operating position and tighten the screws.



2. Install the safety cover. Fix the safety cover on the shaft, using the safety cover bracket with the provided screws.



2b. Tighten the screws after setting the safety cover bracket at the appropriate position.



3. Install the Brush Cutter / Line Trimmer. Remove the outer holder. Insert the Allen Key to lock the inner holder and rotate the left-handed thread nut in the clockwise direction.



4. Install Line Trimmer. Align the hole in the adapter plate with the hole in the shaft and install it with the lock tool. Rotate the nut anti-clockwise until it is securely tightened.




4b. Place the line trimmer head cap.



5. Install the line. Insert the line in the hole and push it forward until the end comes out 2-3 cms from the other hole.




5b. Pull back the line to make sure that the line gets locked.

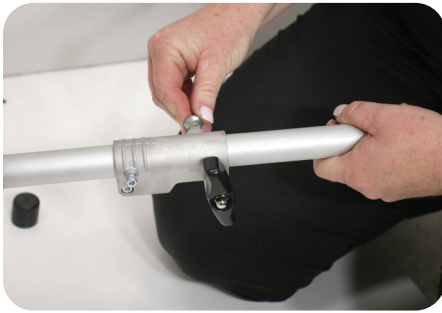


6. Attach the QuickRelease. Align the hole on the unit pole to the QuickRelease pin. Place the QuickRelease pin and rotate the handle until it is tightened.




7. Install the brush cutter. Remove the outer holder (see step 3). Place the blade and outer holder back to the position. Lock the inner holder with Allen Key and turn the nut anti-clockwise.

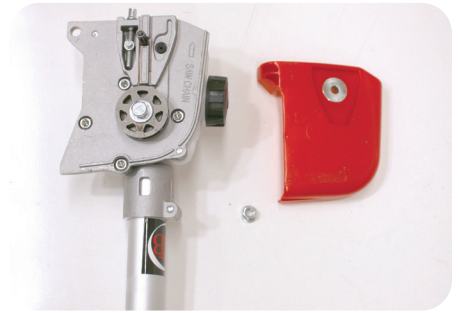


8. Install the chainsaw bar and chain. Remove the screw on the cover and take off the cover.

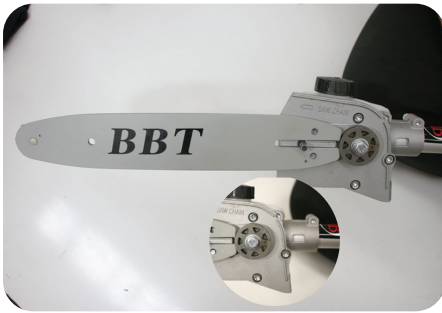

8b. Place the chainsaw bar in its place. Turn the bar adjuster all way in, to let the bar sit on the wheel.

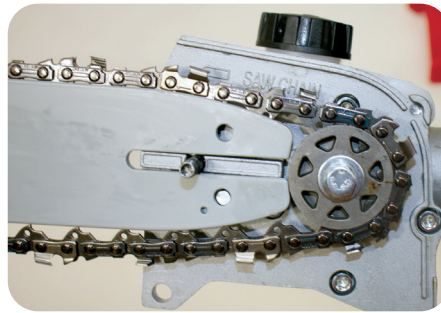

8c. Place the chain around the bar. Make sure that the cutting teeth face the front.

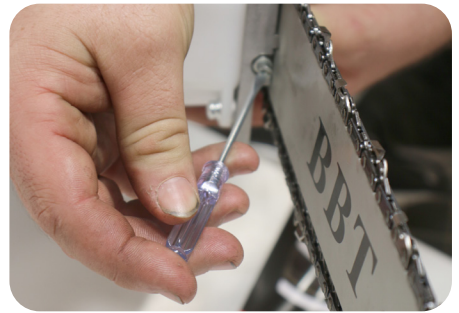

8d. Unscrew the bar adjustment to set the chain in the bar.



8e. Place the cover back. Adjust the bar adjustment to set the chain in the desired tension. Tighten up again before every use.



9. Install the hedge trimmer. Find the longer spline end and place the end to the hedger. Tighten it.

Quick Start Guide

1. For the 2 stroke engine, ensure that the mixture ratio of petrol and oil is 25:1.
2. Move the switch to the 'ON' position..
3. Push the primer bulb repeatedly (7-10 times) until the fuel comes into the primer bulb.
4. Pull the choke up.
5. Pull the throttle lever a little and push down the upper throttle lock button.
6. Pull the starter cord vigorously 2 to 3 times with the other hand.
7. Push the choke downwards.
8. Pull the starter again to run the engine.
9. If the engine does not start, go back to step 4.

